

INDUSTRIAL LABEL PRINTER

DCCode[®]


DC LP402

- USB + Serial + LAN
- Engineered for 24/7 printing
- Built with metal frames and rugged components
- Ribbon roll capacity 600m
- Supports TSPL, EPL, ZPL, DPL
- Optional: Bluetooth, Wi-Fi, Cutter, Peel Off Module



Technical Specifications

	DC LP402		
Resolution	203 DPI	300 DPI	600 DPI
Print speed	254 mm (10") / s	203 mm (8") / s	153 mm (6") / s
Max.print width	104mm (4.09")	104mm (4.09")	104mm (4.09")
Max.print length	1778mm (70")	889mm (35")	889mm (35")
Media			
Media type	Continuous, gap, black mark, fan-fold and punched hole		
Media width	20-120mm (1.0"-4.7")		
Media thickness	0.06~0.254 mm (2.36~10mil)		
Media core diameter	25.4 ~ 76.2 mm (1" ~ 3")		
Label length	10 ~ 889 mm(0.39" ~ 35")		
Label roll capacity	203 mm (8") OD (External Diameter)		
Ribbon capacity	Max.600m		
Ribbon width	20-110 mm		
Ribbon core	25.4 mm (1")		
Performance Features			
Print method	Thermal Transfer / Direct Thermal		
Memory	128 MB Flash Memory/ 128MB SDRAM/ Flash memory upto Max.4GB		
Interface	USB + Serial +LAN		
1D Barcode	Code 39, Code 93, Code 128UCC, Code 128 subsets A, B, C, Codabar, Interleaved 2 of 5, EAN-8, EAN-13, EAN-128, UPC-A, UPC-E, EAN, etc.		
2D Barcode	PDF-417, Maxicode, DataMatrix, QR code, Aztec		
Internal Fonts	8 alpha-numeric bitmap fonts. Windows fonts can be downloaded		
Sensors	1.Gap sensor 2.Cover sensor 3.Black mark sensor 4.Ribbon sensor		
Emulation	TSPL ZPL, EPL, DPL		
Dimension	504 mm (D) x 257 mm (W) x 297 mm (H)		
Weight	11 kg		
Print Head Life	30KM		
Driver	Windows / Linux / Mac		
SDK	Windows / iOS / Android		
Input	AC 110-240V,1.8A, 50-60Hz		
Output	DC 24V, 2.5A, 60W		
Optionals	Cutter, Peel Off, Bluetooth, Wi-Fi, External Stand		
Operational Temp	5° ~ 40°C(41~104°F)Humidity: 25 ~ 85% non-condensing		

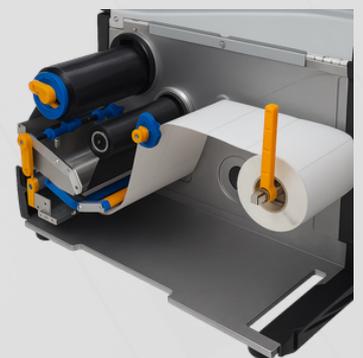

Technical Support: +91 9999571649

DCCode[®]

hello@dcodeinternational.in

www.dcodeinternational.in



DELHI NCR MUMBAI AHMEDABAD SURAT TIRUPUR CHENNAI LUDHIANA PUNE KOLKATA COIMBATORE GUWAHATI